



Incremental encoders

Standard optical	Sendix 5000 / 5020 (shaft / hollow shaft)	Push-pull / RS422 / Open collector
------------------	---	------------------------------------

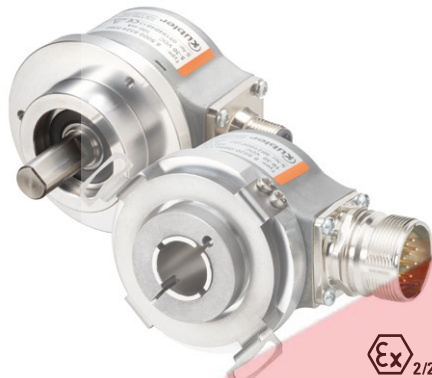

Due to their sturdy bearing construction in Safety-Lock™ Design, the Sendix 5000 and 5020 offer high resistance against vibration and installation errors.

The rugged housing, high protection level of up to IP67, as well as the wide temperature range of -40 °C up to +85 °C, make this product range the perfect encoder for all applications.

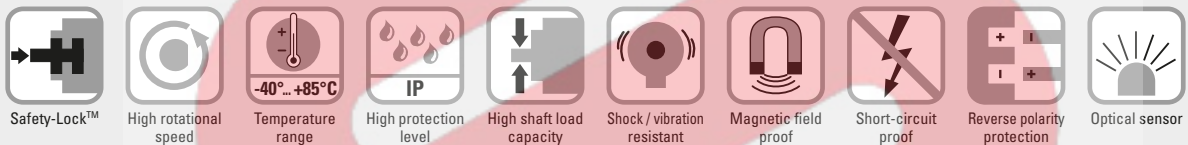

Robust performance

- Increased resistance against shock, vibrations and tolerance of installation errors, elimination of machine downtime and repairs thanks to sturdy bearing construction in "Safety-Lock™ Design".
- Ensures highest safety against field breakdowns and is thus suitable also for outside use thanks to its resistant die-cast housing and protection up to IP67.
- Undetachable clamping ring on hollow shaft encoders.
- Wide temperature range, -40 °C ... +85 °C.

Many variants

- Suitable connection variant for every specific case: cable connection with different standard lengths, M12 (5- or 8-pin), M23 (12-pin), MIL (7- or 10-pin) and Sub-D connector. In addition: Variants with connector fitted in the cable – for error-free electrical connection to your control.
- Reliable mounting in a wide variety of installation situations: comprehensive and proven fixing possibilities.
- Compatible with all US and European standards.
- Wide range of standard pulse ranges up to max. 5000 pulses per revolution.

Technology in detail

Robust Safety-Lock™ bearing structure




Cables with fitted connector



Undetachable clamping ring

Slotted clamping ring + slotted shaft



Tangential cable outlet



Incremental encoders

Standard optical	Sendix 5000 / 5020 (shaft / hollow shaft)	Push-pull / RS422 / Open collector
Order code	8.5000	. XXXXX . XXXX
Shaft version	Type	a b c d e
a Flange	5 = synchro flange, IP66/IP67 6 = synchro flange, IP65 7 = clamping flange, IP66/IP67 8 = clamping flange, IP65 A = synchro flange, IP66/IP67 B = synchro flange, IP65 C = square flange, IP66/IP67 D = square flange, IP65 G = Euro flange, IP66/IP67	<p> \varnothing 50.8 mm [2"] \varnothing 50.8 mm [2"] \varnothing 58 mm [2.28"] \varnothing 58 mm [2.28"] \varnothing 58 mm [2.28"]¹⁾ \varnothing 58 mm [2.28"]¹⁾ \square 63.5 mm [2.5"] \square 63.5 mm [2.5"] \varnothing 115 mm [4.53"]²⁾ </p> <p> 1 = servo flange, IP66/IP67 2 = servo flange, IP65 3 = square flange, IP66/IP67 4 = square flange, IP65 E = servo flange, IP66/IP67 F = servo flange, IP65 </p> <p> \varnothing 50.8 mm [2"]³⁾ \varnothing 50.8 mm [2"]³⁾ \square 52.3 mm [2.06"]³⁾ \square 52.3 mm [2.06"]³⁾ \varnothing 63.5 mm [2.5"]³⁾ \varnothing 63.5 mm [2.5"]³⁾ </p>
b Shaft ($\varnothing \times L$), with flat	1 = \varnothing 6 x 10 mm [0.24 x 0.39"] 2 = \varnothing 1/4 x 5/8" (6.35 x 15.875 mm) 6 = \varnothing 8 x 15 mm [0.32 x 0.59"] 3 = \varnothing 10 x 20 mm [0.39 x 0.79"] 4 = \varnothing 3/8 x 5/8" (9.5 x 15.875 mm) B = \varnothing 11 x 33 mm [0.43 x 1.30"], with feather key shaft slot ⁴⁾ 5 = \varnothing 12 x 20 mm [0.47 x 0.79"]	
	7 = \varnothing 1/4 x 7/8" ³⁾ 8 = \varnothing 3/8 x 7/8" ³⁾	
c Output circuit (with inverted signal) / supply voltage	4 = RS422 / 5 V DC 1 = RS422 / 5 ... 30 V DC 2 = push-pull (7272 compatible) / 5 ... 30 V DC 5 = push-pull / 10 ... 30 V DC	
	3 = open collector / 5 ... 30 V DC ³⁾ 8 = push-pull (7272 compatible), without capacitor / 5 ... 30 V DC ¹⁾³⁾⁶⁾	
d Type of connection – cable	1 = axial cable, 1 m [3.28'] PVC A = axial cable, special length PVC *) 2 = radial cable, 1 m [3.28'] PVC B = radial cable, special length PVC *)	
Type of connection – connector	P = axial M12 connector, 5-pin ⁵⁾ R = radial M12 connector, 5-pin ⁵⁾ 3 = axial M12 connector, 8-pin 4 = radial M12 connector, 8-pin 7 = axial M23 connector, 12-pin 8 = radial M23 connector, 12-pin Y = radial MIL connector, 10-pin W = radial MIL connector, 7-pin ⁵⁾ 9 = radial MIL connector, 6-pin ³⁾⁵⁾	
Type of connection – connector with cable	L = radial cable with M12 connector, 8-pin, special length PVC *) M = radial cable with M23 connector, 12-pin, special length PVC *) N = radial cable with Sub-D connector, 9-pin, special length PVC *)	
*) Available special lengths (connection types A, B, L, M, N):	0.3, 0.5, 1, 2, 3, 4, 5, 6, 8, 10, 12, 15, 20 m [0.98, 1.64, 3.28, 6.56, 9.84, 13.12, 16.40, 19.69, 26.25, 32.80, 39.37, 49.21, 65.62'] order code expansion .XXXX = length in dm ex.: 8.5000.814A.1024.0030 (for cable length 3 m)	
e Pulse rate	1, 2, 4, 5, 10, 12, 14, 20, 25, 28, 30, 32, 36, 50, 60, 64, 80, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 342, 360, 375, 400, 500, 512, 600, 625, 720, 800, 900, 1000, 1024, 1200, 1250, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000 (e.g. 100 pulses => 0100)	
Optional on request	- other pulse rates - Ex 2/22 (not for type of connection L, M, N) ⁷⁾ - surface protection salt spray	
Salt spray tested as standard type (deliverable as from 1 unit)	8.5000.73X4.XXXX-C	



2) Only in conjunction with shaft type B.
3) US version.
4) Only in conjunction with flange type G.
5) Without inverted signal.
6) Attention: no CE types!
7) For the cable connection type, cable material PUR.

Incremental encoders

Standard optical	Sendix 5000 / 5020 (shaft / hollow shaft)		Push-pull / RS422 / Open collector
Order code	8.5020	. XXXXX . XXXX	
Hollow shaft	Type	a b c d e	
<p>a Flange</p> <p>1 = with spring element, long, IP66/IP67 2 = with spring element, long, IP65 3 = with torque stop, long, IP66/IP67 4 = with torque stop, long, IP65 7 = with stator coupling, IP66/IP67 \varnothing 65 mm [2.56"] 8 = with stator coupling, IP65 \varnothing 65 mm [2.56"] C = with stator coupling, IP66/IP67 \varnothing 63 mm [2.48"] D = with stator coupling, IP65 \varnothing 63 mm [2.48"]</p> <p>5 = with stator coupling, IP66/IP67 \varnothing 57.2 mm [2.25"] ¹⁾ 6 = with stator coupling, IP65 \varnothing 57.2 mm [2.25"] ¹⁾</p> <p>b Through hollow shaft</p> <p>1 = \varnothing 6 mm [0.24"] 2 = \varnothing 1/4" 9 = \varnothing 8 mm [0.32"] 4 = \varnothing 3/8" 3 = \varnothing 10 mm [0.39"] 5 = \varnothing 12 mm [0.47"] 6 = \varnothing 1/2" A = \varnothing 14 mm [0.55"] 8 = \varnothing 15 mm [0.59"] 7 = \varnothing 5/8"</p> <p>c Output circuit (with inverted signal) / supply voltage</p> <p>4 = RS422 / 5 V DC 1 = RS422 / 5 ... 30 V DC 2 = push-pull (7272 compatible) / 5 ... 30 V DC 5 = push-pull / 10 ... 30 V DC</p> <p>3 = open collector / 5 ... 30 V DC ¹⁾ 8 = push-pull (7272 compatible), without capacitor / 5 ... 30 V DC ^{1) 2)}</p> <p>d Type of connection – cable</p> <p>1 = radial cable, 1 m [3.28'] PVC A = radial cable, special length PVC *) E = tangential cable, 1 m [3.28'] PVC F = tangential cable, special length PVC *)</p> <p>Type of connection – connector</p> <p>R = radial M12 connector, 5-pin ³⁾ 2 = radial M12 connector, 8-pin 4 = radial M23 connector, 12-pin 6 = radial MIL connector, 7-pin 7 = radial MIL connector, 10-pin</p> <p>Type of connection – connector with cable</p> <p>H = tangential cable, 0.3 m [0.98'] PVC, incl. M12 connector, 8-pin for central fastening L = tangential cable with M12 connector, 8-pin, special length PVC *) M = tangential cable with M23 connector, 12-pin, special length PVC *) N = tangential cable with Sub-D connector, 9-pin, special length PVC *)</p> <p>e Pulse rate</p> <p>1, 2, 4, 5, 10, 12, 14, 20, 25, 28, 30, 32, 36, 50, 60, 64, 80, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 342, 360, 375, 400, 500, 512, 600, 625, 720, 800, 900, 1000, 1024, 1200, 1250, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000 (e.g. 100 pulses => 0100)</p> <p>Optional on request</p> <ul style="list-style-type: none"> - other pulse rates - Ex 2/22 (not for type of connection E, F, H, L, M, N) ⁴⁾ - surface protection salt spray <p>Salt spray tested as standard type (deliverable as from 1 unit)</p> <p>8.5020.18X2.XXXX-C 8.5020.1AX2.XXXX-C</p>			



1) US version.
2) Attention: no CE types!
3) Without inverted signal.
4) For the cable connection type, cable material PUR.

Incremental encoders

Standard optical	Sendix 5000 / 5020 (shaft / hollow shaft)	Push-pull / RS422 / Open collector
------------------	---	------------------------------------


Mounting accessory for shaft encoders	Order no.
---------------------------------------	-----------

Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]	8.0000.1102.0606
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010

Mounting accessory for hollow shaft encoders	Dimensions in mm [inch]	Order no.
--	-------------------------	-----------

Torque pin, ø 4 mm	with fixing thread	8.0010.4700.0000
---------------------------	--------------------	------------------


for flange with spring element
(flange type 1 + 2)



Isolation / adapter inserts for hollow shaft encoders
order code
8.5020.X8XX.XXXX

Thermal and electrical isolation of the encoders
(Temperature range -40 °C ... +115 °C [-40 °F ... +239 °F])
Isolation inserts prevent currents from passing through the encoder bearings. These currents can occur when using inverter controlled three-phase or AC vector motors and considerably shorten the service life of the encoder bearings. In addition the encoder is thermally isolated as the plastic does not transfer the heat to the encoder.

D1	Isolation insert
6 mm	8.0010.4021.0000
8 mm	8.0010.4020.0000
10 mm	8.0010.4023.0000
12 mm	8.0010.4025.0000
1/4"	8.0010.4022.0000
3/8"	8.0010.4024.0000
1/2"	8.0010.4026.0000

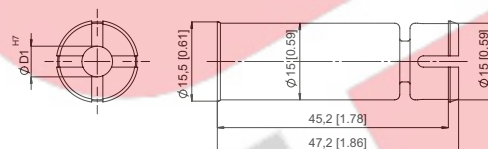

Cables and connectors	Order no.
-----------------------	-----------

Preassembled cables	M12 female connector with coupling nut, 8-pin, A coded, straight single ended 2 m [6.56'] PVC cable	05.00.6041.8211.002M
	M23 female connector with coupling nut, 12-pin, cw single ended 2 m [6.56'] PVC cable	8.0000.6901.0002
Connectors	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)	05.CMB 8181-0
	M23 female connector with coupling nut, 12-pin, cw	8.0000.5012.0000
	MIL female connector with coupling nut, 10-pin	8.0000.5062.0000

Further Kübler accessories can be found at: kuebler.com/accessories
Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Incremental encoders

Standard optical		Sendix 5000 / 5020 (shaft / hollow shaft)	Push-pull / RS422 / Open collector
------------------	--	---	------------------------------------

Technical data

Mechanical characteristics		
Maximum speed	IP65	12000 min ⁻¹
		6000 min ⁻¹ (continuous)
	IP66/IP67	6000 min ⁻¹
		3000 min ⁻¹ (continuous)
Mass moment of inertia	shaft version	approx. 1.8 x 10 ⁻⁶ kgm ²
	hollow shaft version	approx. 6 x 10 ⁻⁶ kgm ²
Starting torque at 20 °C [68 °F]	IP65	< 0.01 Nm
	IP66/IP67	< 0.05 Nm
Shaft load capacity	radial	100 N
	axial	50 N
Weight		approx. 0.4 kg [14.11 oz]
Protection acc. to EN 60529		
	without shaft seal	IP65
	with shaft seal	IP66/IP67
Working temperature range		-40 °C ¹⁾ ... +85 °C [-40 °F ¹⁾ ... +185 °F]
Material	shaft	stainless steel
Shock resistance acc. to EN 60068-2-27		3000 m/s ² , 6 ms ²⁾
Vibration resistance acc. to EN 60068-2-6		300 m/s ² , 10 ... 2000 Hz ³⁾

Approvals		
UL compliant in accordance with	File no. E224618	
CE compliant in accordance with	EMC Directive	2014/30/EU
	RoHS Directive	2011/65/EU
	ATEX Directive	2014/34/EU (for Ex 2/22 variants)
UKCA compliant in accordance with	EMC Regulations	S.I. 2016/1091
	RoHS Regulations	S.I. 2012/3032
	UKEX Regulations	S.I. 2016/1107 (for Ex 2/22 variants)

Electrical characteristics						
Output circuit	RS422 (TTL compatible)	RS422 (TTL compatible)	Push-pull	Push-pull (HTL/TTL universal, 7272 compatible)	Push-pull (7272 compatible, without capacitor)	Open collector (7273)
Order code	1	4	5, 7	2	8	3
Supply voltage	5 ... 30 V DC	5 V DC (±5 %)	10 ... 30 V DC	5 ... 30 V DC	5 ... 30 V DC	5 ... 30 V DC
Power consumption (no load)	typ. 40 mA max. 90 mA	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA	100 mA
Permissible load / channel	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA	20 mA sink at 30 V DC
Pulse frequency	max. 300 kHz	max. 300 kHz	max. 300 kHz	max. 300 kHz ⁴⁾	max. 300 kHz	max. 300 kHz
Signal level	HIGH LOW	min. 2.5 V max. 0.5 V	min. +V - 1.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V	
Rising edge time t _r	max. 200 ns	max. 200 ns	max. 1 µs	max. 1 µs	max. 1 µs	
Falling edge time t _f	max. 200 ns	max. 200 ns	max. 1 µs	max. 1 µs	max. 1 µs	
Short circuit proof outputs ⁵⁾	yes ⁶⁾	yes ⁶⁾	yes	yes	yes ⁶⁾	yes
Reverse polarity protection of the supply voltage	yes	no	yes	no	no	no

1) With connector: -40 °C [-40 °F], cable fixed: -30 °C [-22 °F], cable moved: -20 °C [-4 °F].

2) For MIL connectors: 2500 m/s²

3) For MIL connectors: 100 m/s²

4) Max. recommended cable length 30 m [98.43'].

5) If supply voltage correctly applied.

6) Only one channel allowed to be shorted-out:
at +V= 5 V DC, short-circuit to channel, 0 V, or +V is permitted.
at +V= 5 ... 30 V DC, short-circuit to channel or 0 V is permitted.