


**TYPE OA, OB
NON-STANDARD NEMA "C" FACE MOUNTING**

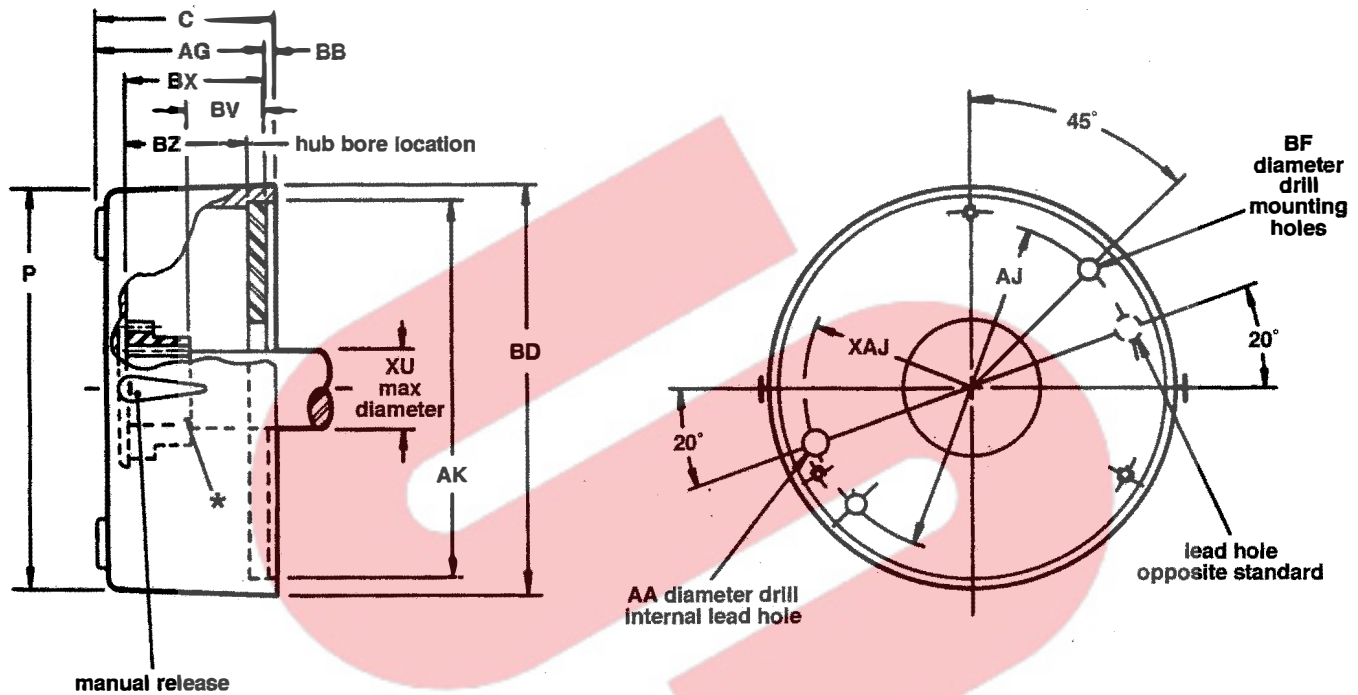

BRAKE SIZE	C	P	AA	AG	AJ	XAJ	AK	BB	BD	BF	BV	BX	BZ	XU
OA	3.69	8.62	.62	3.47	7.25	3.25	8.500	.22	8.75	17/32	1.38	2.56	2.31	1.625
OB	4.56			4.34							1.94	3.81	3.56	

Note: For brake cover removal an axial clearance of 3.00 inches is required for size "OA" brake. Add 1.00 inch to this above dim for "OB" brake.

Pads on "OA" brake only.

*If a shoulder cannot be provided a snap ring must be used.

- "OA" brake available with adjustable and non-adjustable torque.

Reference drawing D-1860-B.

AVAILABLE STANDARD BORES & KEYWAYS			
SIZE OA		SIZE OB	
BORE	KEYWAY	BORE	KEYWAY
.562	.13	—	—
.750	.19	.750	.19
.875		.875	
1.125	.25	1.125	.25
1.375	.31	1.375	.31
1.625	.38	1.625	.38