


Bremsmotoren mit Käfigläufer KBA Bauform IM B 14, IM V 18, IM V 19

Brake motors with squirrel-cage rotor type KBA mounting IM B 14, IM V 18, IM V 19

Moteurs-freins à cage d'écureuil KBA Forme de construction IM B 14, IM V 18, IM V 19

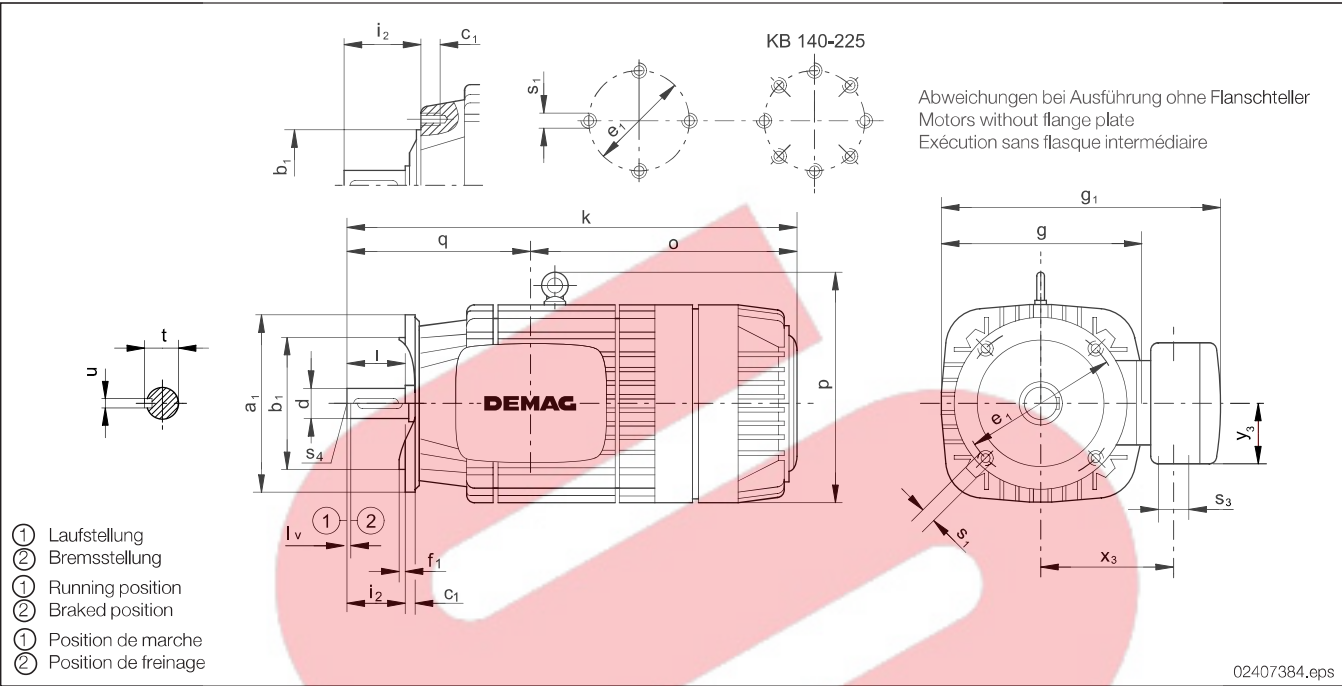

Größe Size Type	d	l	lv _{max}	t	u	s ₄	Flansch ¹⁾ flange ¹⁾ bride ¹⁾	a ₁	b ₁	c ₁	e ₁	f ₁	g	g ₁	i ₂	k	o	p	q	s ₁	s ₃	x ₃	y ₃
KBA 71 A	14	30	3,0	16	5	M5	2)	108	70	10	85	3,0	140	204	41,5	286	167	140*)	119	M6	4xM25	94	54
							C 105	105															
							C 120	120															
							C 140	140															
KBA 71 B	14	30	3,0	16	5	M5	2)	108	70	10	85	3,0	140	204	41,5	306	187	140*)	119	M6		94	54
							C 105	105															
							C 120	120															
							C 140	140															
KBA 80 A	19	40	3,0	21,5	6	M6	2)	123	80	11	100	3,5	158	222	53,5	339	204	158*)	135	M8		103	54
							C 120	120															
							C 140	140															
							C 160	160															
KBA 80 B	19	40	3,0	21,5	6	M6	2)	123	80	11	100	3,5	158	222	53,5	354	219	158*)	135	M8		103	54
							C 120	120															
							C 140	140															
							C 160	160															
KBA 90 A	24	50	3,0	27,0	8	M8	2)	140	80	11	100	3,5	178	242	63,5	379	224	178*)	155	M8		113	54
							C 120	120															
							C 140	140															
							C 160	160															
KBA 90 B	24	50	3,0	27,0	8	M8	2)	140	80	11	100	3,5	178	242	63,5	395	240	178*)	155	M8		113	54
							C 120	120															
							C 140	140															
							C 160	160															