




MVE 440/2E-20A0 [EE20020020A0LA000U]

3 PH - 2 poles - 3600 RPM - 230/460 V - 60 Hz

Working moment (Lb*in)	Unbalance (Lb*in)	Centrifugal force (Lb)	Nominal voltage (V)	Input power (Hp)	Current (A)	Power factor	Ia/In
2.27	1.14	416.67	230/460	0.24	Δ 0.6 Y 0.3	0.75	3.5

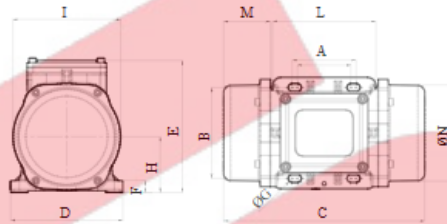

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS (inches)													
Weight (Lb)	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
15.43	2.44	4.17	0.35	4	9.17	5.12	6.06	0.59	2.56	4.92	4.72	2.13	4.41

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque (Ft-Lb)	Cable type	Cable gland
/	Yes	5/16"	0.344"x0.688"	16.95	13-4c 80°C	M20 80°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
6302 2Z		4457	8705	35657

CERTIFICATION	
ATEX II2 D Ex tb IIIC Tx Db IP66 IECEX Ex tb IIIC Tx Db IP66 CLASS II DIV.2 GROUP F,G T4 Ex tb IIIC Tx Db IP66 [Tx Size Micro,10-30;100°C - Tx Size 40-91;135°C] CONFORM TO UL1004-3, UL1004-1, UL 60079-0, UL60079-31 CERT. CSA C22.2 No.100, CSA C22.2 No.77, CSA C22.2N.60079-0, CSA C22.2N. 60079-31 T.Amb -20/+40°C	

REV.0-n/a

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.