



GEAR UNIT CAD CONFIGURATION


TECHNICAL DATA

TYPE	MI	RATIO	25
SIZE	30	FREQUENCY [Hz]	50Hz
RATIO	25	INPUT SPEED [rpm]	1400
DOUBLE EXTENDED WORM SHAFT	NO	OUTPUT SPEED [rpm]	56
PAM	PAM56B14	INPUT POWER [kW]	0,12
HOLLOW OUTPUT SHAFT	D.14	OUTPUT TORQUE [Nm]	15
FIXING	STANDARD	EFFICIENCY	0,75
VERSION		SERVICE FACTOR	1,3
MOUNTING POSITION	SCRIVIMOUNTINGPOSITION		

ACCESSORIES


OPTIONAL

MOUNTED ELECTRIC MOTOR	NO	ATEX	NO
LIMITER	NO	LUBRICANT	LONG LIFE SYNTHETIC OIL ISO VG 320
TORQUE ARM	NO		
EXTENDED OUTPUT SHAFT	NO		

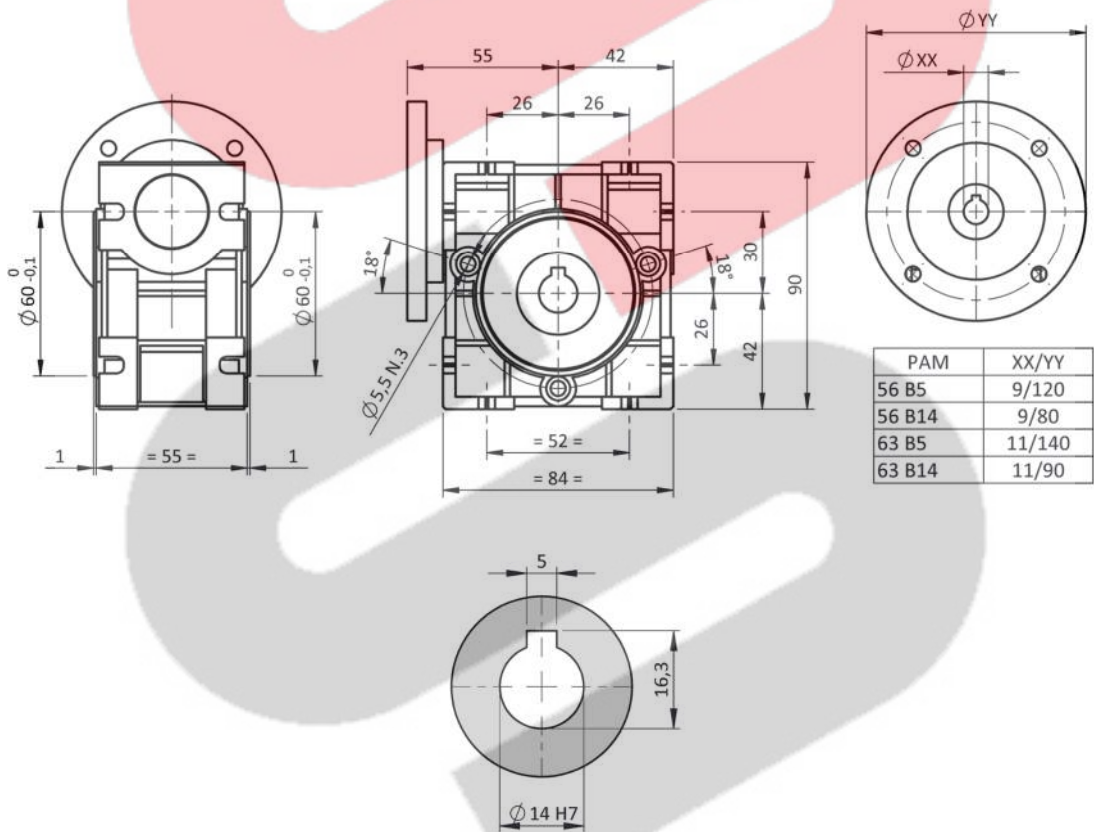





AVAILABLE ACCESSORIES

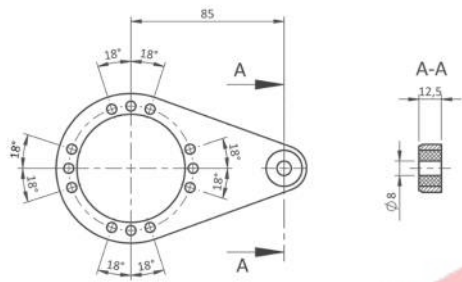

TORQUE ARM

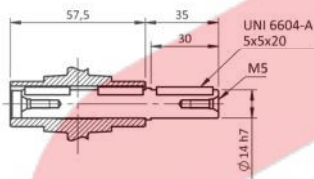

SINGLE EXTENDED OUTPUT SHAFT

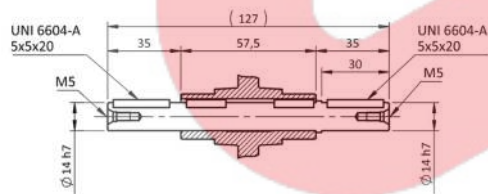

DOUBLE EXTENDED OUTPUT SHAFT

