
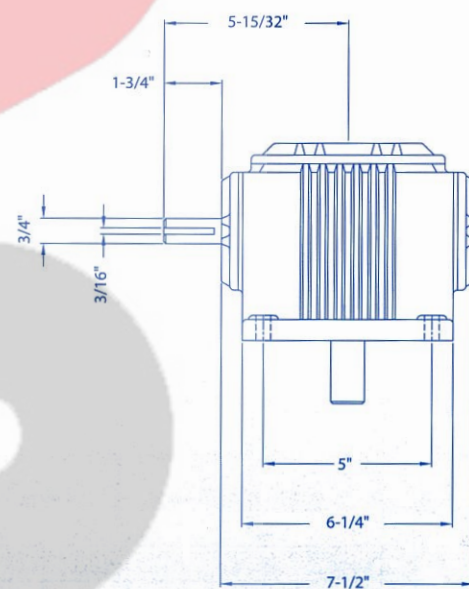
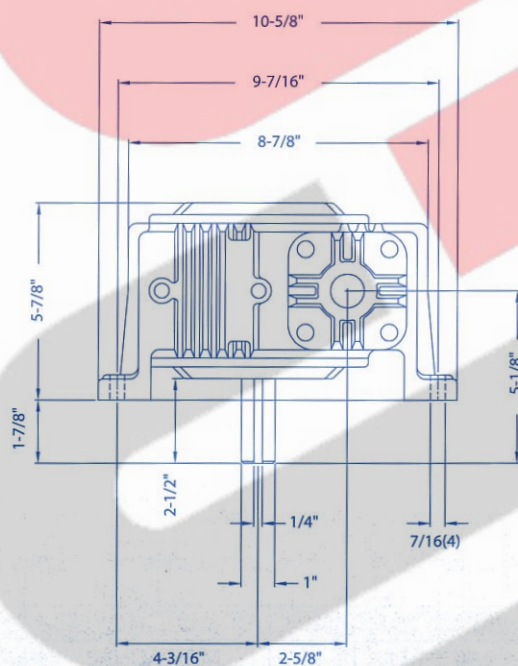
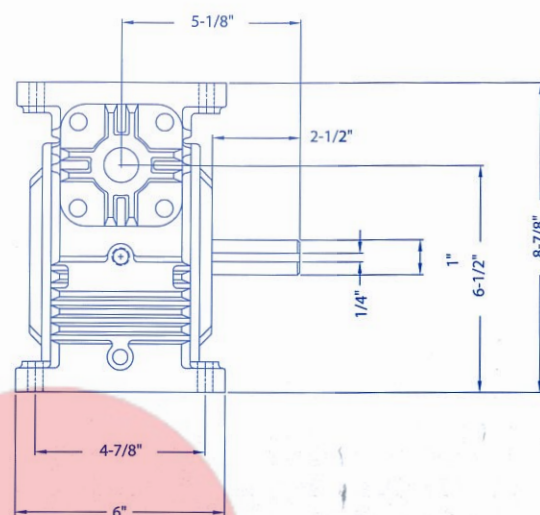


262

1262

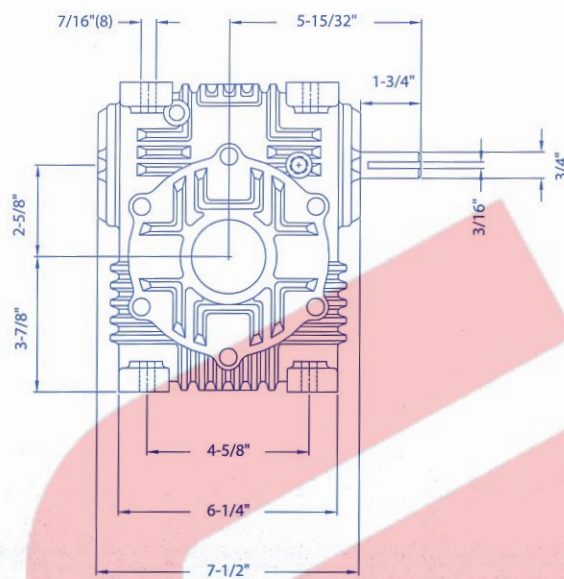

CAPACIDADES PARA REDUCTORES EN C.P. Y PAR TAMAÑOS 262 Y 1262

ENTRADA R.P.M.	RELACION	5	10	15	20	25	30	40	50	60	70
1.750	ENTRADA EN C.P.	3.08	2.46	2.02	1.58	1.32	1.20	0.99	0.79	0.74	0.69
	PAR Kg. Cm.	581	827	862	898	906	915	722	792	809	809
	SALIDA R.P.M.	350	175	116	87.5	70	58.5	43.5	34.5	29	25
1.150	ENTRADA EN C.P.	2.82	2.02	1.67	1.32	1.09	0.97	0.83	0.58	0.53	0.48
	PAR Kg. Cm.	748	986	1030	1074	1062	1082	1070	810	810	810
	SALIDA R.P.M.	230	115	76	57	46	38	29	23	19	16
870	ENTRADA EN C.P.	2.46	1.67	1.36	1.06	0.93	0.84	0.70	0.46	0.40	0.35
	PAR Kg. Cm.	854	1064	1118	1161	1179	1179	1161	810	810	810
	SALIDA R.P.M.	174	87	58	43	34	29	22	17	14	12
690	ENTRADA EN C.P.	1.97	1.32	1.06	0.79	0.70	0.62	0.53	0.39	0.35	0.32
	PAR Kg. Cm.	958	1179	1170	1161	1258	1205	1161	810	810	810
	SALIDA R.P.M.	138	69	46	34	27.5	23	17	14	11	10
100	ENTRADA EN C.P.	0.53	0.28	0.23	0.18	0.18	0.16	0.14	0.12	0.09	0.05
	PAR Kg. Cm.	1180	1206	1183	1162	1258	1203	1161	810	810	810
	SALIDA R.P.M.	20	10	6	5	4	3.3	2.5	2	1.6	1.4