



13 - DESIGNAZIONE

13 - DESIGNATION

13 - BEZEICHNUNG

13 - DESIGNATION

TA 35 35 D A 15 HS B ...OPZIONI / OPTIONS
OPTIONEN / OPTIONS

10

POSIZIONE DI MONTAGGIO / MOUNTING POSITION
EINBAULAGEN / POSITION DE MONTAGE

11

A B C D VA VBCONFIGURAZIONE ALBERO VELOCE / INPUT SHAFT CONFIGURATION
BEZEICHNUNG DER ANTRIEBESSEITE / DESIGNATION ENTREE**HS** Albero cilindrico / solid input shaft
cylindrischer Antriebswelle / arbre rapide cylindrique**080 B5** Predisposizione motore standard IEC
IEC-motor mounting flange
090 B5 Getriebe vorbereitet für IEC-Motor
Réducteur préparé pour liaison
a moteur IECSolo TA 30
TA 30 only
Nur TA 30
Seulement TA 30RAPPORTO DI TRASMISSIONE / GEAR RATIO
ÜBERSETZUNG / RAPPORT DE REDUCTION**i**DISPOSITIVO ANTIRETRO / ANTI-RUN BACK DEVICE
RÜCKLAUFSPERRE / DISPOSITIF ANTI-RETOUR**A** antiretro fornito con rotazione libera DESTRA
anti-runback fitted allowing the RIGHT direction of rotation
Rücklaufsperr für die RECHTS Richtung der Umdrehung
anti-retour fournis avec rotation libre DROITE**-** anti retro non fornito / anti-runback not specified
Ohne Rücklaufsperr / pas de anti-retourNUMERO DI RIDUZIONI / REDUCTIONS
ANZAHL DER STUFEN / NOMBRES DES TRAINS**D** riduttore a due stadi / 2-reduction unit
Getriebe mit 2 Stufen / reducteur deux trains
- riduttore a uno stadio / 1-reduction unit
Getriebe mit 1 Stufe / reducteur un trainDIAMETRO ALBERO LENTO / OUTPUT SHAFT BORE
ABTRIEBSWELLE DURCHMESSER / DIAMETRE ARBRE LENT**35 40 45 50 60 70 80 100 125 135**

GRANDEZZA RIDUTTORE / GEAR FRAME SIZE / GETRIEBEBAUGRÖSSE / TAILLE REDUCTEUR

30 35 40 45 50 60 70 80 100 125

TIPO RIDUTTORE / GEARBOX TYPE / GETRIEBETYPE / TYPE DU REDUCTEUR



TA



TA 45



TA 45

TA 45 45	34
50	34
55	33

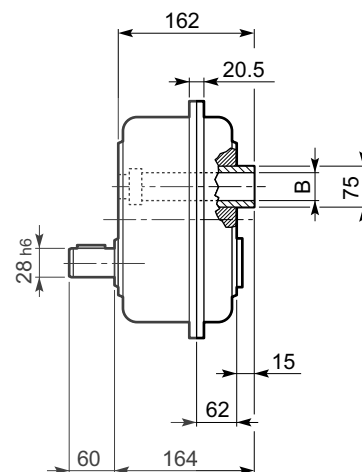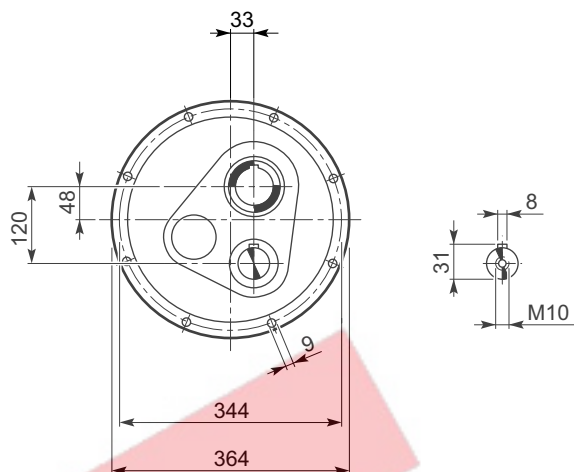


TA 45_D

TA 45_D 45	38
50	38
55	37

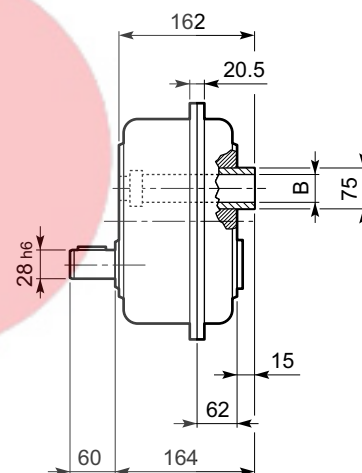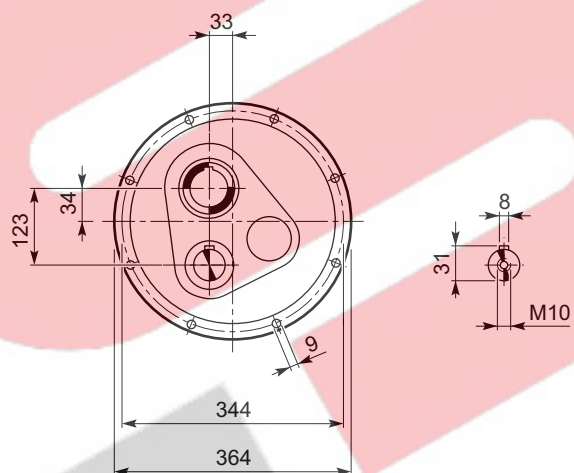

OUTPUT

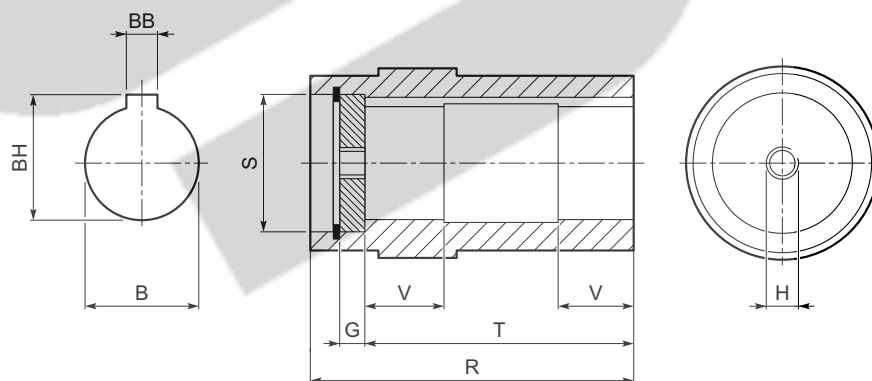

		B G7	BB	BH	G	H	R	S	T	V
TA 45 45		45	14	48.8	14	M16	162	60	140	35
50		50	14	53.8	14	M16	162	60	140	35
55		55	16	59.8	14	M16	162	65	140	35