

G-BH 7 N

Data sheet 2BH7 410


Side channel blower with IE3-motors




**Elmo
Rietschle**

IE3

UL [®] **US**



Performance curves

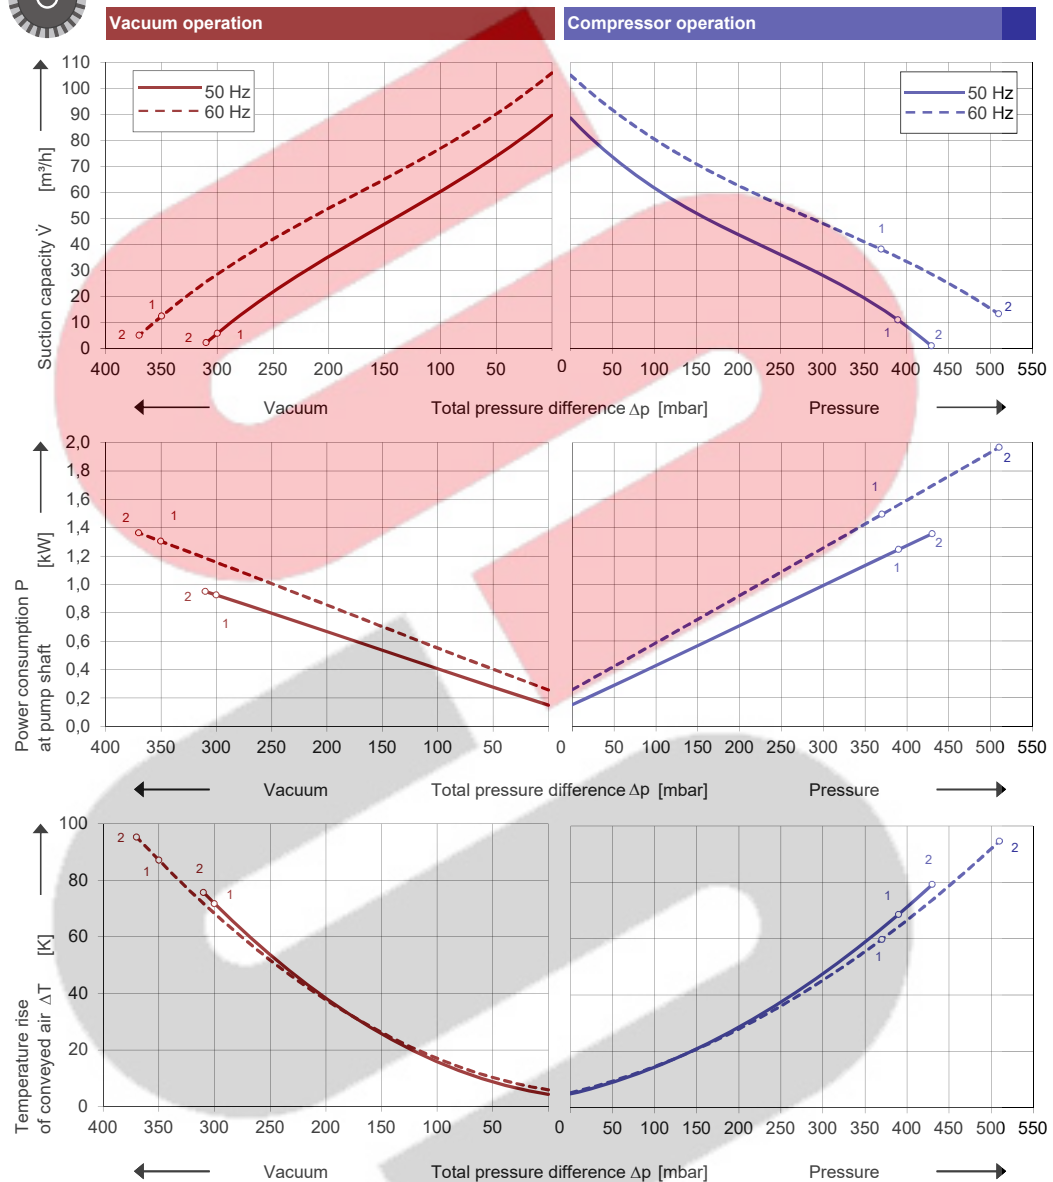

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

Selection and ordering data										
Type 2BH7 410										
No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pressure level ³⁾ dB(A)	Efficiency ⁴⁾ 0	Weight Approx. kg	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
		Hz	V	A	kW	mbar				
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239)										
1	50	190-210 Δ	5,6 Δ	1,3	-300	390	58	IE3	26	2BH7410-0AK11-1
	60	190-210 YY / 380-420 Y	6,3 YY / 3,2 Y	1,6	-350	370	63	IE3		
	60	200 YY	6,3 YY	1,6	-350	370	63	NP		
2	50	190-210 Δ	6,9 Δ	1,8	-310	430	63	IE3	29	2BH7410-0AK21-1
	60	190-210 YY / 380-420 Y	7,8 YY / 3,9 Y	2,0	-370	510	68	IE3		
	60	200 YY	7,8 YY	2,0	-370	510	68	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239)										
1	50	220-240 Δ / 380-420 Y	4,9 Δ / 2,9 Y	1,3	-300	390	58	IE3	26	2BH7410-0AK16-1
	60	220-240 YY / 440-480 Y	5,5 YY / 2,8 Y	1,6	-350	370	63	IE3		
	60	230 YY / 460 Y	5,5 YY / 2,8 Y	1,6	-350	370	63	NP		
2	50	220-240 Δ / 380-420 Y	6,0 Δ / 3,5 Y	1,8	-310	430	63	IE3	29	2BH7410-0AK26-1
	60	220-240 YY / 440-480 Y	6,8 YY / 3,4 Y	2,0	-370	510	68	IE3		
	60	230 YY / 460 Y	6,8 YY / 3,4 Y	2,0	-370	510	68	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239)										
1	50	500 Y	2,3 Y	1,3	-300	390	58	IE3	26	2BH7410-0AQ13-1
	60	575 Y	2,2 Y	1,6	-350	370	63	NP		
2	50	500 Y	2,8 Y	1,8	-310	430	63	IE3	29	2BH7410-0AQ23-1
	60	575 Y	2,7 Y	2,0	-370	510	68	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239)										
1	50	/					58		26	2BH7410-0AQ16-1
	60						63			
	60						63			
2	50	/					63		29	2BH7410-0AQ26-1
	60						68			
	60						68			
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239)										
1	50	380-420 Δ /	2,9 Δ /	1,3	-300	390	58	IE3	26	2BH7410-0AQ17-1
	60			1,6	-350	370	63	IE3		
	60	460 Δ		1,6	-350	370	63	NP		
2	50	380-420 Δ /	3,5 Δ /	1,8	-310	430	63	IE3	29	2BH7410-0AQ27-1
	60			2,0	-370	510	68	IE3		
	60	460 Δ		2,0	-370	510	68	NP		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- 4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

All G-BH match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages										
				Efficiency ⁴⁾	 US					
50 Hz		60Hz				60 Hz	2BH7.....	☐	☐	-1
3~										
200 VD		200 V YY / 230 VD / 400 VY		 IE3	•		K	1		
190-210 VD		190-210 VYY / 220-240 VD / 380-420VY								
200 V YY / 230 VD / 400 VY		230 V YY / 460 VY		 IE3	•		K	6		
190-210 VYY / 220-240 VD / 380-420VY		220-240 VYY / 440-480VY								
475-525 V Y		550-600 V Y		 IE3	•		Q	3		
475-525 VD		550-600 VD								
220-240 VD / 380-420 V Y		440-480 V Y		 IE3	•		Q	6		
400 VD / 690 V Y		460 VD								

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown.

Gardner Denver Deutschland GmbH

Gardner Denver Schopfheim GmbH

