


030-150

Dimensioni / Dimensions / Abmessungen / Encombresments / Dimensiones

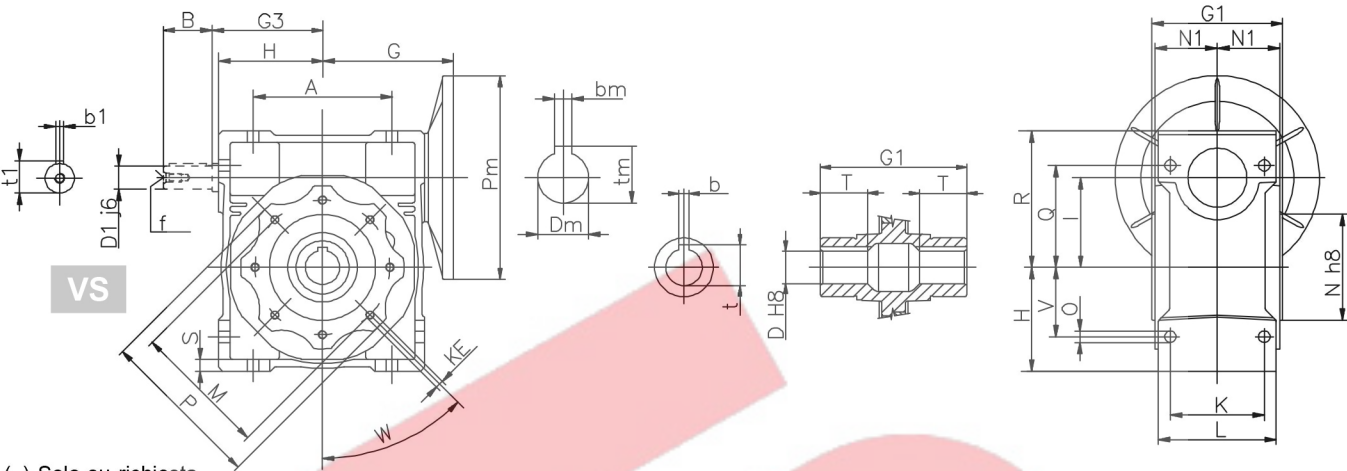

(..) Solo su richiesta
(..) Only on request
(..) Auf Wunsch
(..) Seulement sur demande
(..) Sólo bajo pedido

	030	040	050	063	075	090	105	110	130	150
A	54	70	80	100	120	140	170	170	200	240
B	20	23	30	40	50	50	60	60	80	80
D	14	18 (19)	25 (24)	25 (28)	28 (35)	35 (38)	42	42	45	50
D1	9	11	14	19	24	24	28	28	30	35
G	55	70	80	95	112.5	129.5	160	160	180	210
G1	63	78	92	112	120	140	155	155	170	200
G3	45	53	64	75	90	108	135	135	155	175
H	40	50	60	72	86	103	127.5	127.5	147.5	170
I	30	40	50	63	75	90	110	110	130	150
K	44	60	70	85	90	100	115	115	120	145
KE	M6*11 (4)	M6*10 (4)	M8*10 (4)	M8*14(8)	M8*14(8)	M10*18(8)	M10*18(8)	M10*18(8)	M12*21(8)	M12*21(8)
L	56	71	85	103	112	130	144	144	155	185
M	65	75	85	95	115	130	165	165	215	215
N	55	60	70	80	95	110	130	130	180	180
N1	29	36.5	43.5	53	57	67	74	74	81	96
O	6.5	6.5	8.5	8.5	11.5	13	14	14	16	18
P	75	87	100	110	140	160	200	200	250	250
Q	44	55	64	80	93	102	125	125	140	180
R	57	71.5	84	102	119	135	167.5	167.5	187.5	230
S	5.5	6.5	7	8	10	11	16	14.5	15.5	18
T	21	26	30	36	40	45	50	50	60	72.5
V	27	35	40	50	60	70	85	85	100	120
W	0°	45°	45°	45°	45°	45°	45°	45°	45°	45°
b	5	6	8	8	8 (10)	10	12	12	14	14
t	16.3	20.8 (21.8)	28.3 (27.3)	28.3 (31.3)	31.3 (38.3)	38.3 (41.3)	45.3	45.3	48.8	53.8
b1	3	4	5	6	8	8	8	8	8	10
t1	10.2	12.5	16	21.5	27	27	31	31	33	38
f	-	-	M6	M6	M8	M8	M10	M10	M10	M12
~Kg	1.2	2.3	3.5	6.2	9	13	21	35	48	84

~kg Peso senza motore / Weight without motor / Gewicht ohne Motor / Poids sans moteur / Peso sin motor

Per le dimensioni relative alla zona attacco motore (Pm, Dm, bm, tm) fare riferimento alla tabella di pag. 38.
For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 38.
Zu den Abmessungen des Motoranschlußflansches (Pm, Dm, bm, tm) siehe Tabelle auf Seite 38.
Pour les dimensions concernant la zone de montage du moteur (Pm, Dm, bm, tm) lire SVP le tableau à la page 38.
Para las magnitudes correspondientes a la zona del motor (Pm, Dm, bm, tm) consulte la tabla de la página 38.